


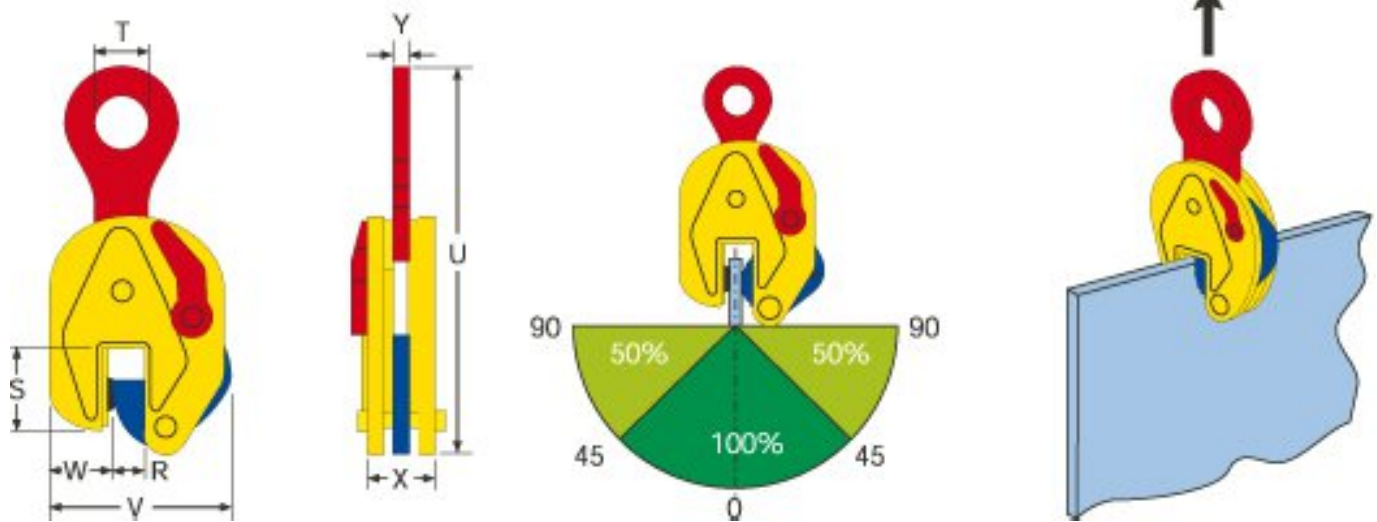

Type	Capacity (kg/piece)	JAW-opening (R) (mm)	di mensions							Weight (kg/pc)
			S	T	U	V	W	X	Y	
0.75 TS	750	0 - 13	47	30	205	100	35	37	10	1,5
1 TS	1000	0 - 18	55	45	265	125	38	47	15	3,3
1 TSE	1000	0 - 25	55	45	265	142	38	47	15	3,6
1.5 TS	1500	0 - 20	80	65	335	165	55	56	17	6,3
2 TSE	2000	0 - 35	80	65	335	185	55	56	17	6,5
3 TSE	3000	0 - 35	80	65	335	185	55	56	17	6,7
4.5 TS	4500	0 - 25	85	70	430	200	60	77	20	14,8
4.5 TSE	4500	0 - 45	85	70	430	230	60	77	20	15,9
6 TS	6000	0 - 32	114	75	490	225	78	78	20	18,6
7.5 TS	7500	0 - 40	112	75	530	245	76	86	20	24
7.5 TSE	7500	0 - 55	112	75	530	267	70	86	20	25
9 TS	9000	0 - 55	112	75	530	267	70	86	20	26
12 TS	12000	0 - 52	148	85	617	295	100	94	44	42
15 TS	15000	0 - 76	159	86	760	375	135	105	50	71
17 TS	17000	0 - 76	159	86	760	375	135	105	50	71
20 TS	20000	0 - 80	195	100	880	465	150	140	66	140
25 TS	25000	5 - 85	195	100	880	465	150	140	66	140
30 TS	30000	10 - 90	195	100	880	465	145	140	66	145
6 STS	6000	40 - 90	115	75	490	275	70	78	20	20
7.5 STS	7500	50 - 100	110	75	525	315	70	82	20	24
9 STS	9000	50 - 100	110	75	525	315	70	82	20	25
12 STS	12000	50 - 100	153	86	615	345	100	94	44	42
15 STS	15000	80 - 150	175	86	755	450	136	106	50	77
20 STS	20000	80 - 150	185	100	875	640	153	140	66	145
25 STS	25000	80 - 150	185	100	875	640	153	140	66	145
30 STS	30000	80 - 150	185	100	880	640	153	155	66	148